

BULLFROG SPAS
Pre-Delivery Guide

PREPARING FOR

DELIVERY

A standard delivery may be accomplished using specialized moving equipment, if your delivery path meets the following criteria.

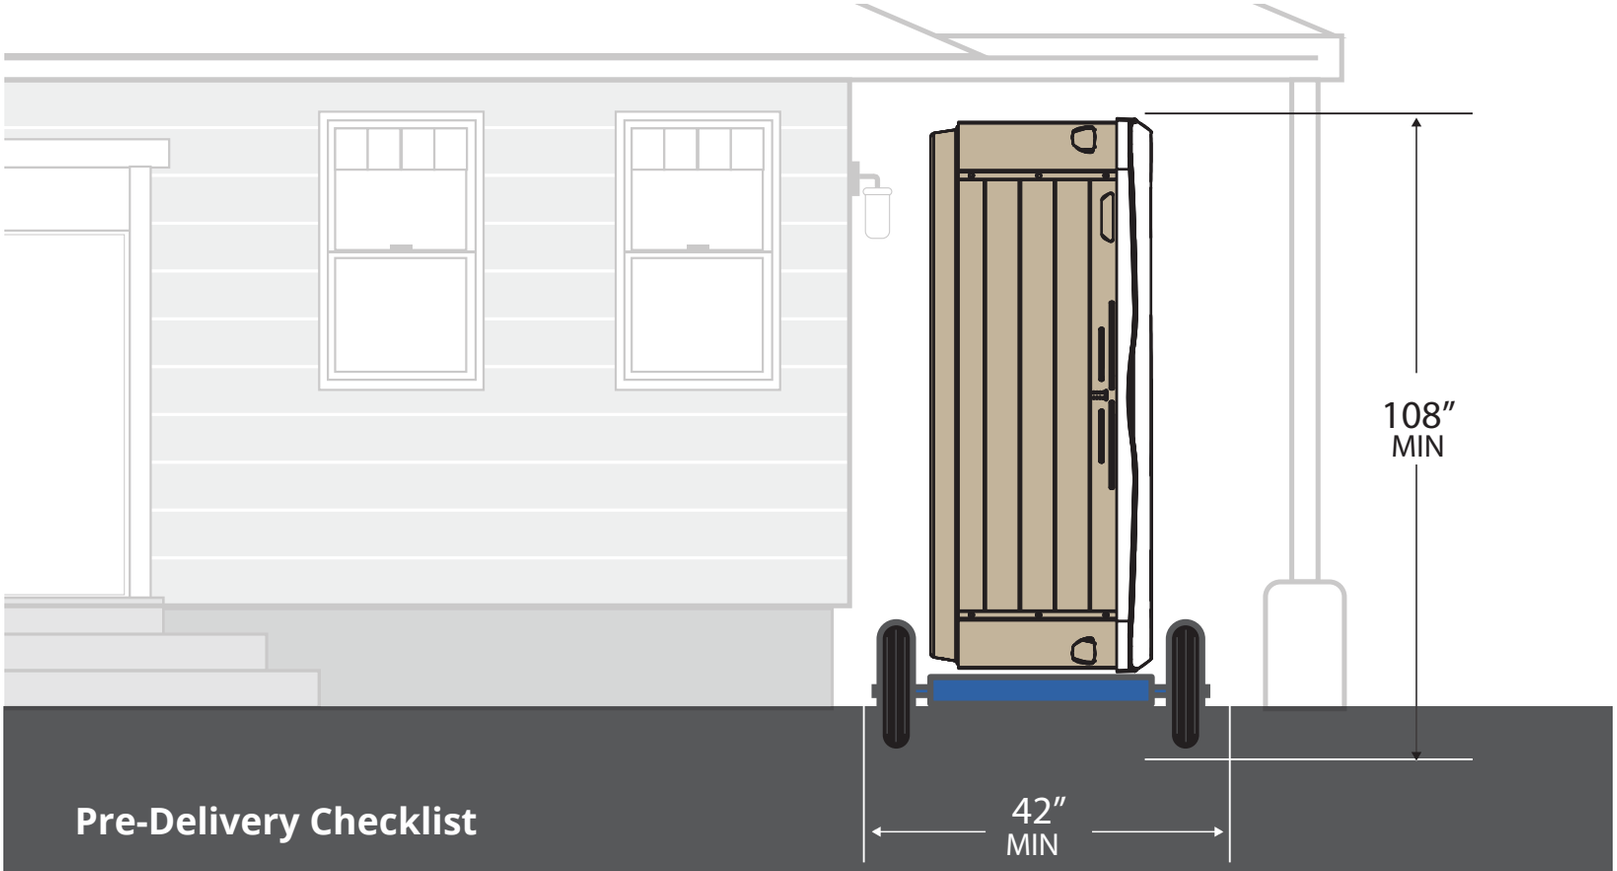

Pre-Delivery Checklist

- [ ] The path is generally flat
- [ ] There are no significant obstacles
- [ ] The entire path is at least 42″ wide and 108″ tall
- [ ] There are no more than 4 consecutive steps
- [ ] The spa pad is no more than four feet off the ground
- [ ] The pad is level, flat, and has no high or low spots
- [ ] Notify Bullfrog if you have an old spa that needs to be removed
- [ ] Your electrical is complete and up to code

If your yard does not meet all of these criteria, please contact us immediately so we can come prepared with additional resources to safely deliver your spa. *

*Additional charges may be associated with deliveries that do not meet the standard delivery requirements.

CHOOSING A

LOCATION

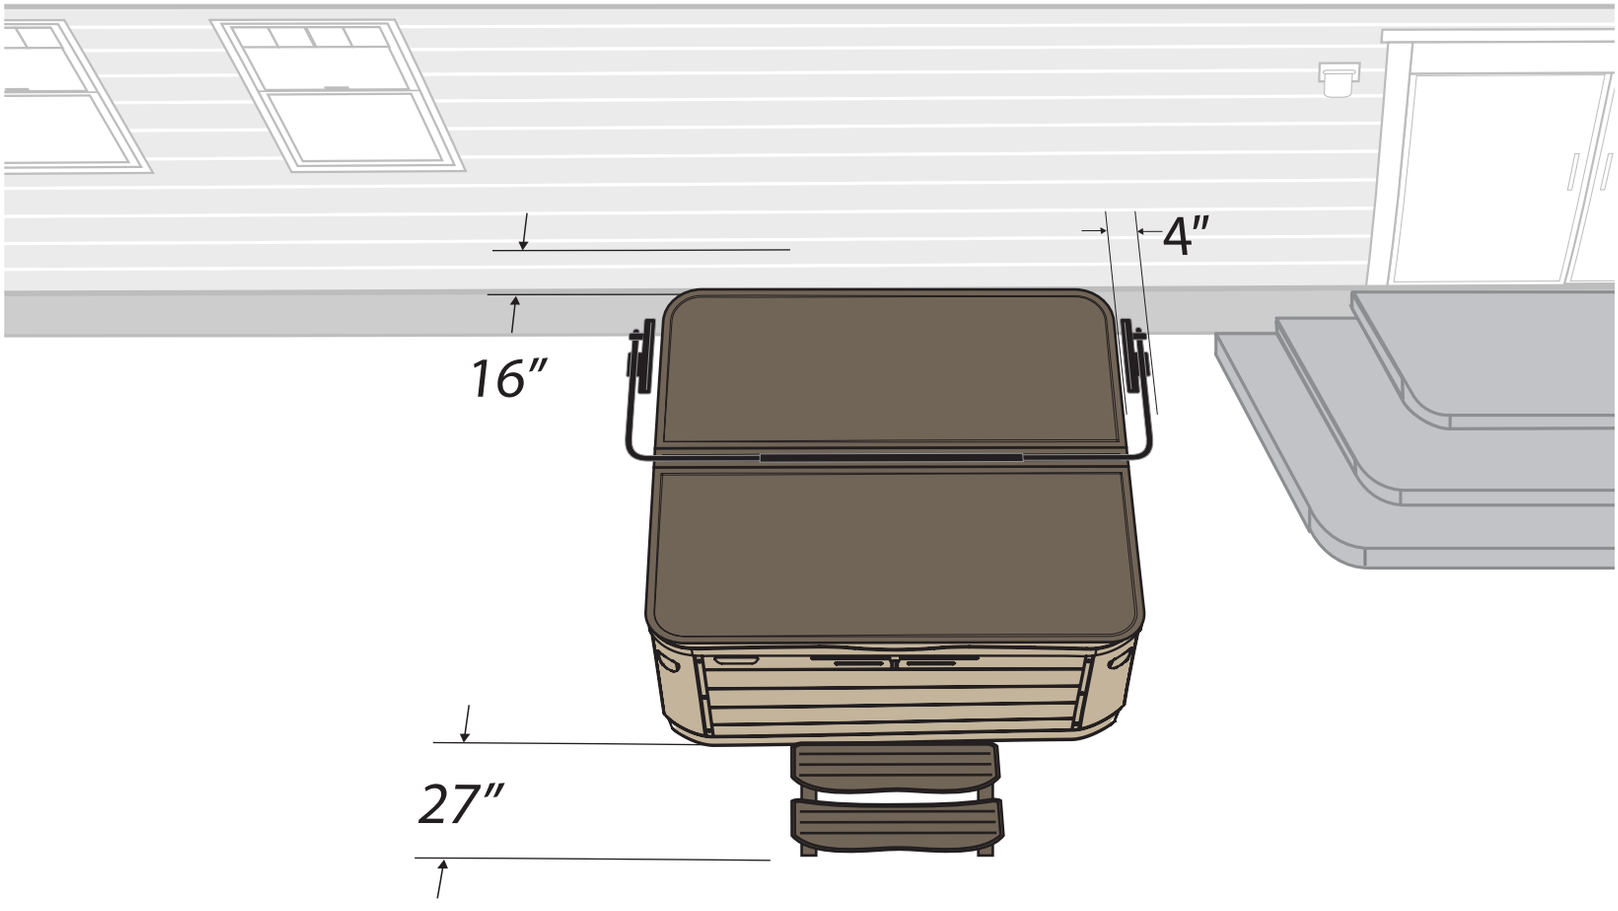

When choosing a location ...

Consider the distance from your home, the view, the and room for accessories to operate (above). Select a structurally sound flat surface that is reasonably level to serve as your spa's foundation. A foundation that shifts or settles may cause stress to the spa shell.

Common Surface Choices

- Concrete Pad
- Pavers
- Contained Gravel
- Decking

If your spa's pad is slightly sloped it will not affect the performance of the spa or its structure, however, **there should be no dips, sags, or unevenness in the pad. It must be flat!**

PREPARING YOUR

ELECTRICAL

The electrical wire is not included with the purchase of your spa. However, we can make the final connection if the following is completed before the delivery date.

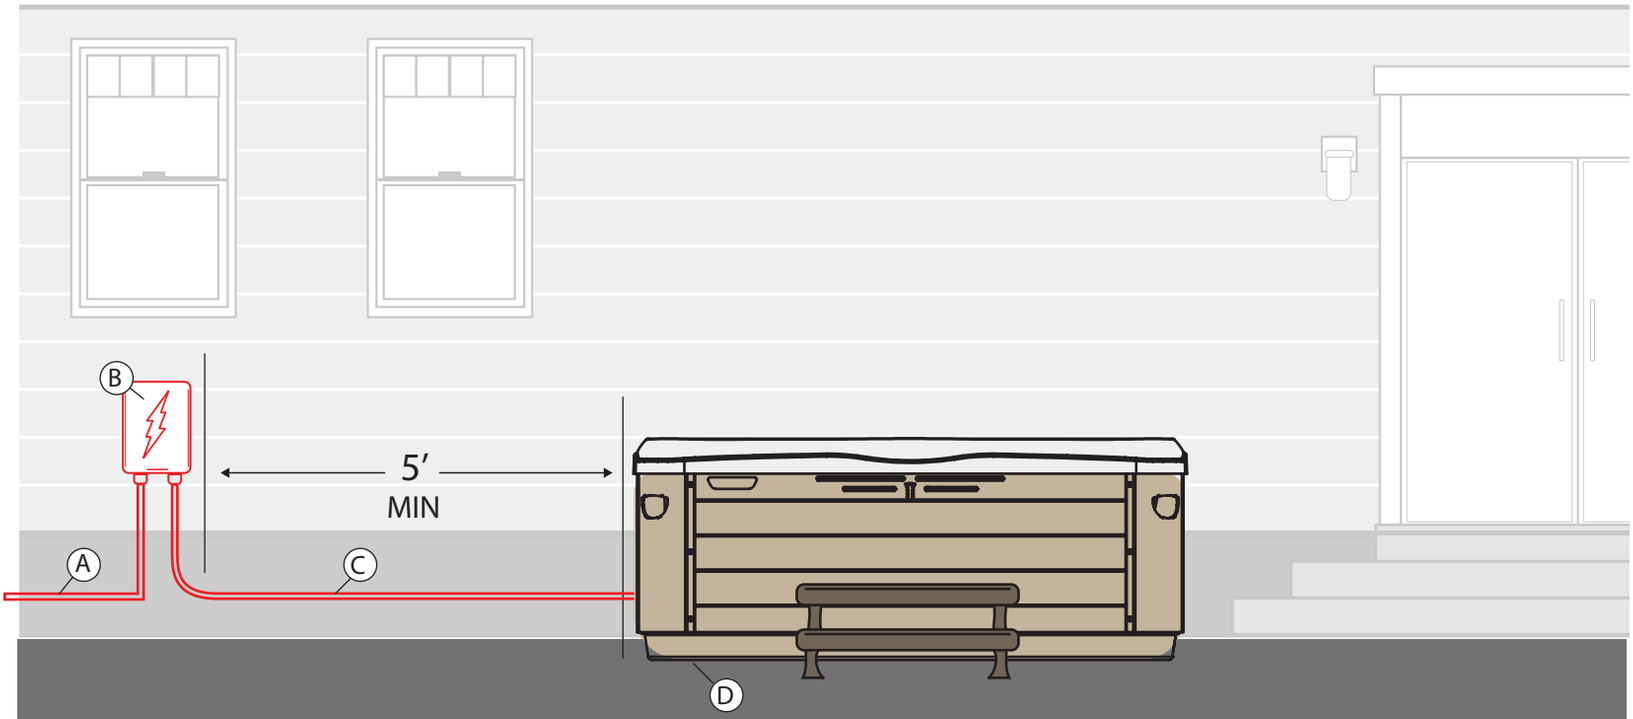

When we arrive...

We expect to find your electrical wire **completely installed** with a minimum of 25 feet of wire coming from the spa disconnect. We will not run any wire but are more than happy to make the final connection after your spa is in place.

- (A) Supply Line
- (B) Spa Disconnect / Breaker Box
- (C) ¾", non-metallic, flexible conduit, 25′ long
- (D) Optional stub-up location (underneath spa)

TECHNICAL REQUIREMENTS

SERVICE	220V/240V
AMPERAGE	50 OR 60*
BREAKER TYPE	GFCI
WIRE TYPE	6/3WG
CONDUIT DIAMETER	¾"
CONDUIT TYPE	NON-METALLIC
MINIMUM WHIP	25 FEET

*CONTACT YOUR DEALER FOR THE EXACT AMPERAGE YOUR SPA REQUIRES.

PREPARING YOUR

ELECTRICAL

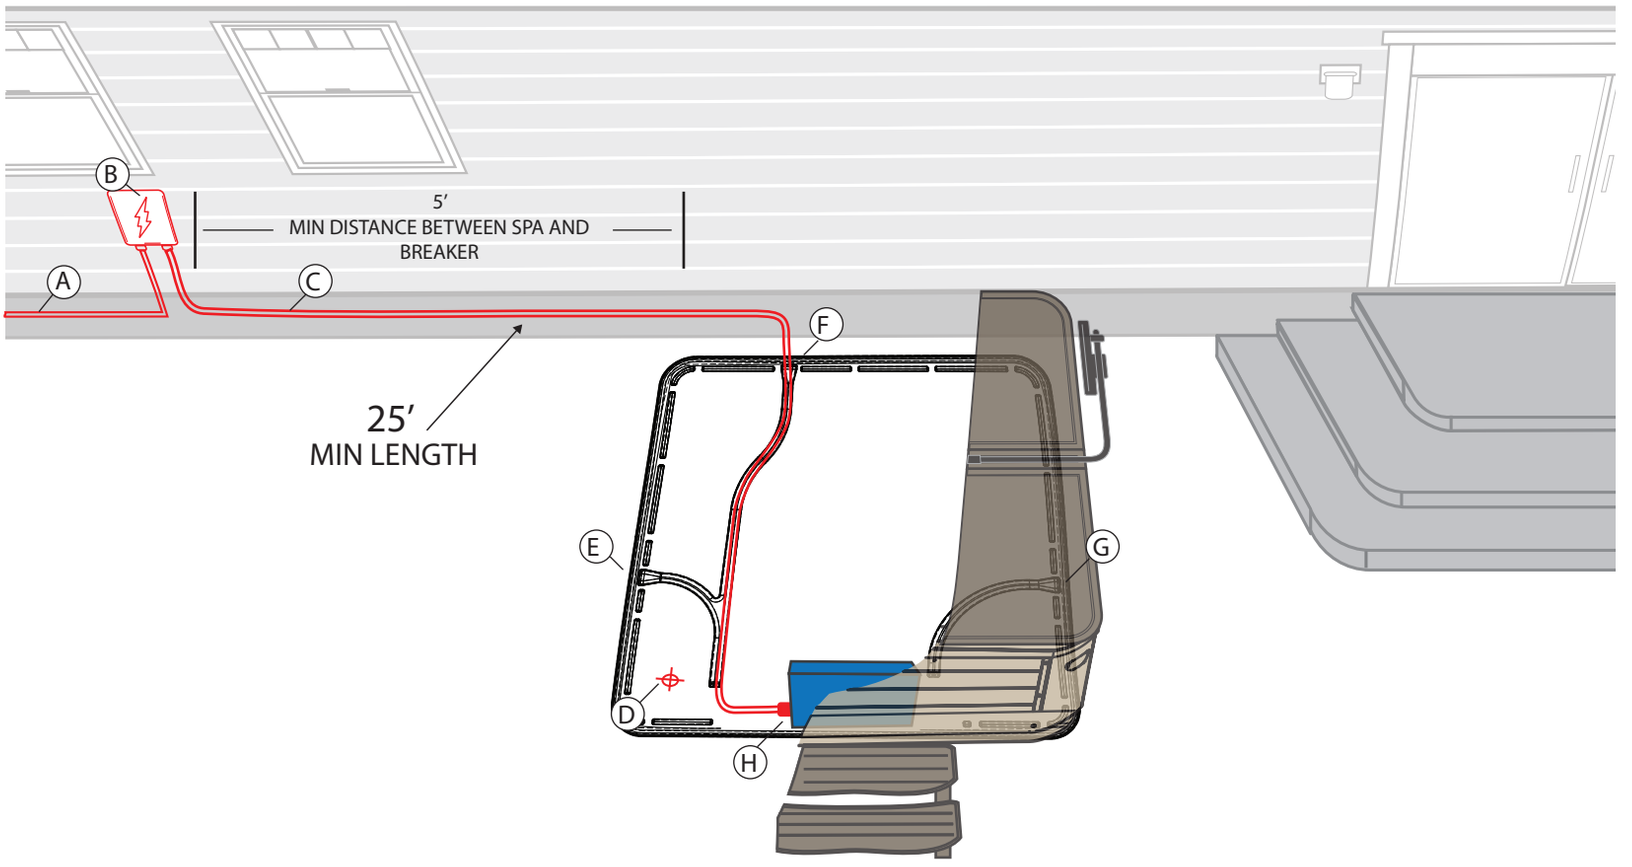

Ⓐ Supply Line
Ⓑ Spa Disconnect / Breaker Box
Ⓒ ¾", non-metallic, flexible conduit, 25' long
Ⓓ Optional stub-up location (underneath spa)
Ⓔ Electrical chaseway #1
Ⓕ Electrical Chaseway #2
Ⓖ Electrical Chaseway #3
Ⓗ Hard-Wired connection inside spa

All electrical requirements must be up to code and installed by a certified electrician. Bullfrog Spas of Northern Utah does not provide electrical services. To ensure that your electrical work is complete prior to delivery please contact our recommended providers.

ELECTRICAL CHASEWAY DIAGRAM

Each spa features three electrical chaseways, one on each side of the spa as demonstrated below.

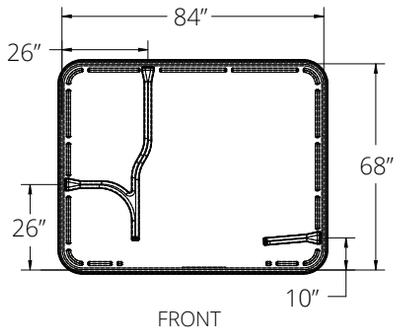

FRONT
A5L / R5L
Power Rating : **50 A**

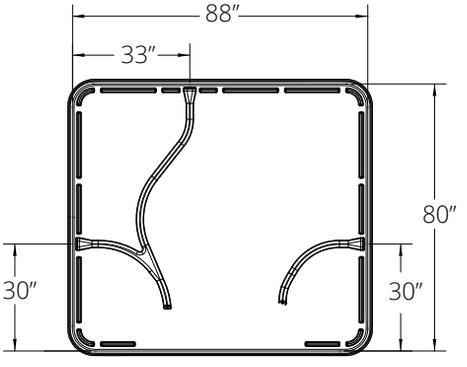

FRONT
A6 / R6
Power Rating : **50 A**

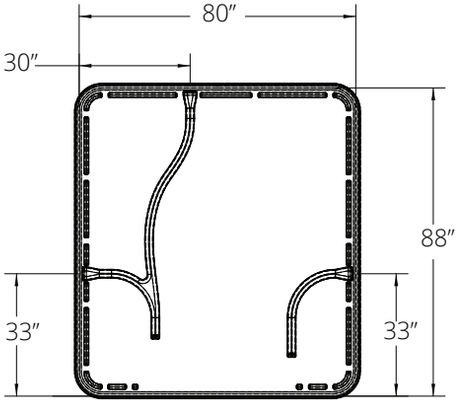

FRONT
A6L / R6L
Power Rating : **50 A**

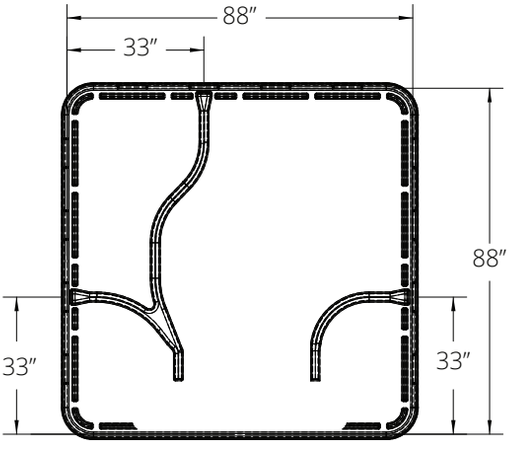

FRONT
A7 / A7L / R7 / R7L
Power Rating : **50 A**

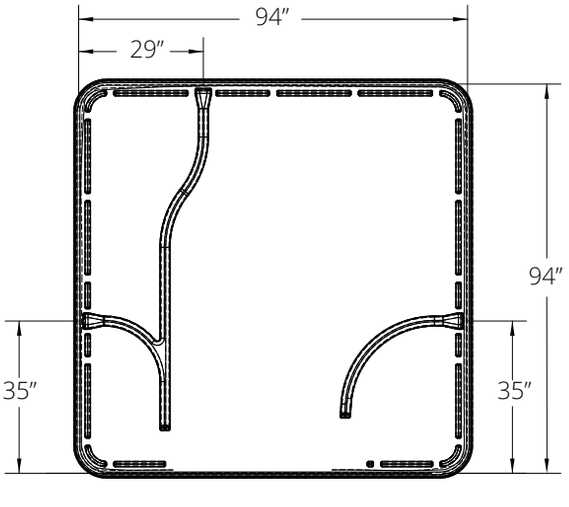

FRONT
A8 / A8L / A8D / R8 / R8L
Power Rating : **50 A**

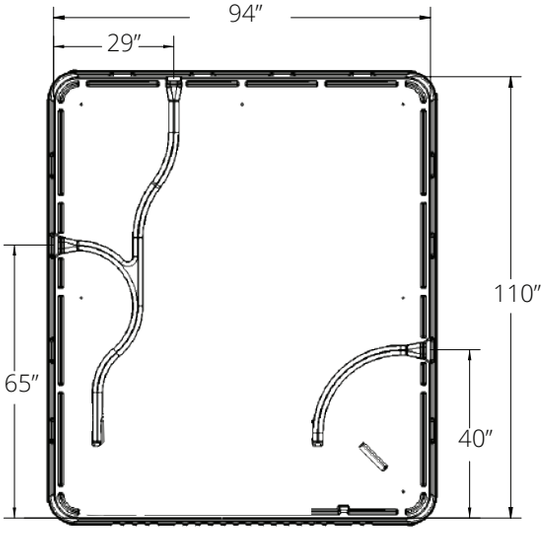

FRONT
A9L
Power Rating : **60 A**

ELECTRICAL CHASEWAY DIAGRAM

Each spa features three electrical chaseways, one on each side of the spa as demonstrated below.

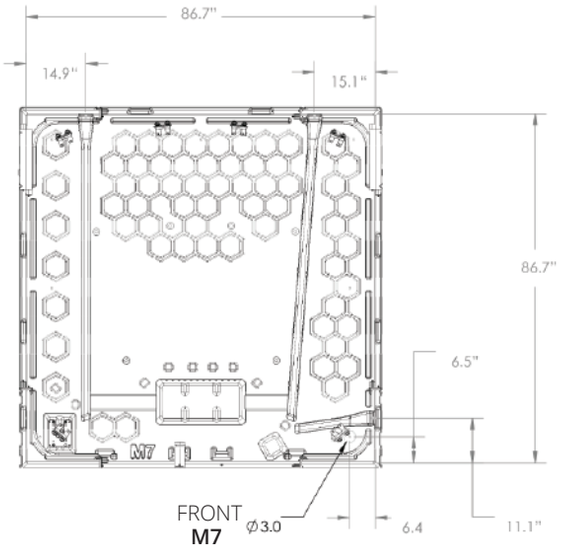

M7
Power Rating : **50 A**

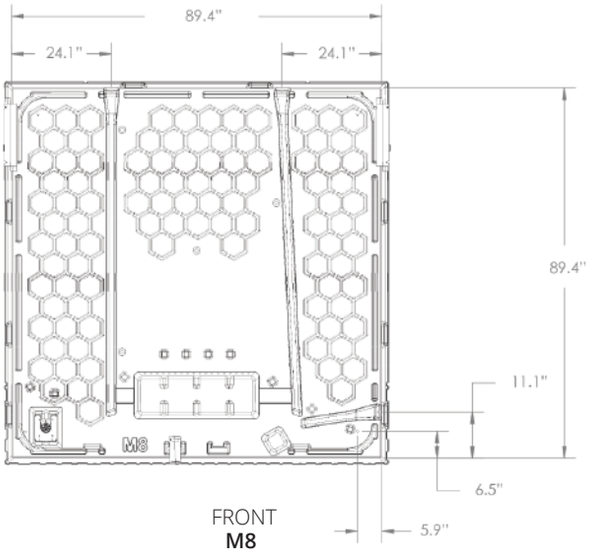

M8
Power Rating : **60 A**

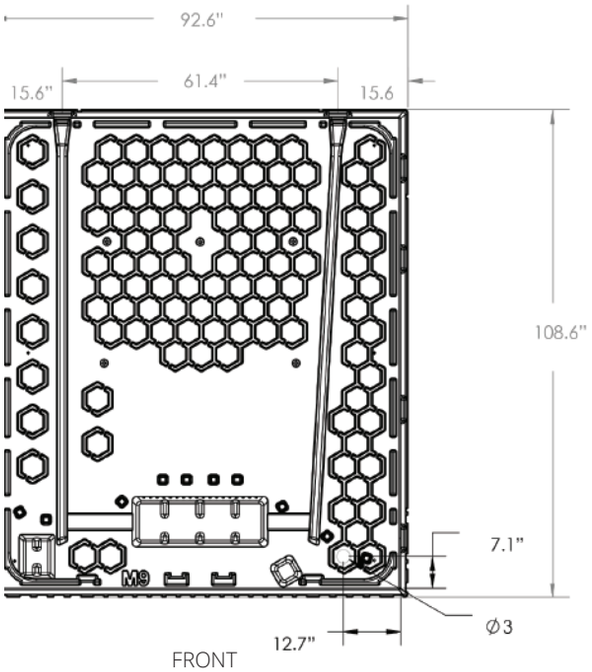

M9
Power Rating : **60 A**